




TECHNICAL DATA		UNIT.	FD- 65	FD- 80	
<b>CAPACITY</b>					
Capacity 1/18	lb		70	80	
Capacity 1/20	lb		60	75	
Hourly Output *	lb/h		59,3	138 / 9	
Evaporation capacity *	l/h		30,9	32,1	
<b>DRUM</b>					
Ø Drum	in		37.25	37.25	
Ø Door	in		31.50	31.50	
Door center height	in		41	41	
Load hole bottom height	in		64.50	64.50	
Drum length	in		30.75	36.85	
Drum volume	cu ft		19.4	23.3	
<b>POWER</b>					
Drum motor power	hp		0,75	0,75	
Fan motor power	hp		0,75	0,75	
Electric heating power	kW		30	36	
Total electric power (elec.model)	kW		31,15	37,15	
Gas heating power	btu/h		140,000	140,000	
Total electric power (gas model)	kW		1,15	1,15	
Steam heating power	kW		50,1	50,1	
Steam heating power (gas model)	kW		1,15	1,15	
<b>CONNECTIONS</b>		<b>ELECTRIC.</b>	<b>GAS</b>	<b>ELECTRIC.</b>	<b>GAS</b>
120 V / 60 Hz / 1	FLA	-	20 A	-	15 A
208-240 V / 50-60 Hz / 1 / 3	FLA	Not Available	-	Not Available	-
Gas connection	in	-	0.50	-	0.50
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Net Width / Gross Width	in		38.75 / 42	38.75 / 42	
Net Depth / Gross Depth	in		41.50 / 45.50	47.60 / 51.60	
Net Height / Gross Height	in		76.60 / 82	76.60 / 82	
Height without heating battery	in		-	-	
Net weight / Gross weight	lb		507 / 573	573 / 628	

<b>OTHERS</b>				
Max airflow	CFM		706	706
Ø Duct Size	in		8	8
Sound level	dB		65	65

\* It may vary depending on the type of heating, filter cleanliness or extraction type.

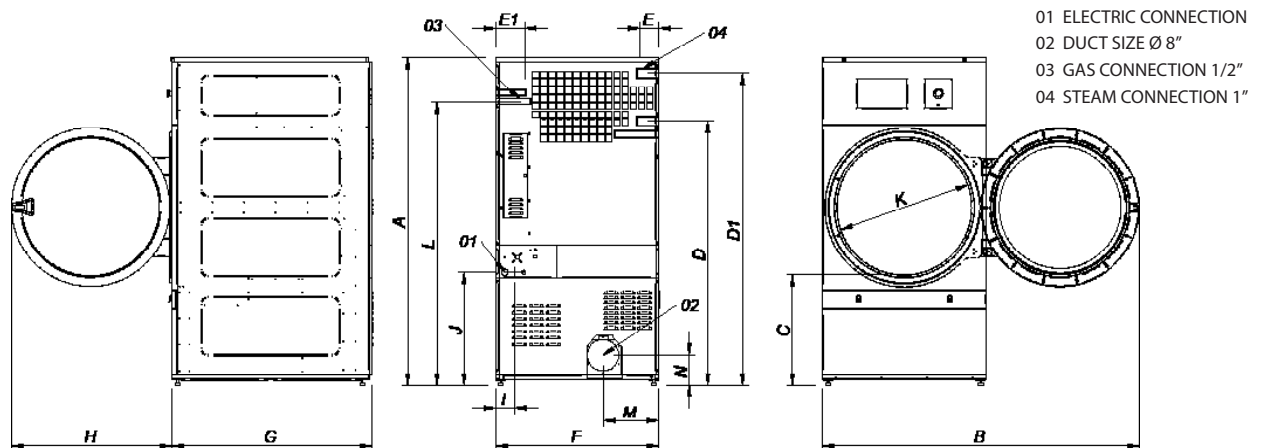

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N
FD-65	76.60	75	25	62.60	74	4.50	6.85	38.75	41.50	37.75	4.30	26.75	31.60	67.25	13.35	7
FD-80	76.60	75	25	62.60	74	4.50	6.85	38.75	47.60	37.75	4.30	26.75	31.60	67.25	13.35	7

